

KYTOLA® OILAN A4 is an online oil water content analyzer which instantly shows changes in the lubrication oil water content. It is an excellent instrument for supporting preventative maintenance.

OILAN A4 detects water leaks in their early stages and helps to prevent expensive failures and down time of the lubricated machinery and equipment.



- Measures the absolute water content in oil (ppm)
- For mineral oils as well as some synthetic oils
- Range up to 5 000 ppm
- Accuracy ± 30 ppm
- Easy to install by quick connect couplings

WATER IN OIL ANALYZER OILAN A4

FEATURES

- Online measurement
- Serial communication with upper level systems
- 4—20 mA output
- Alarm relay
- Monitoring and calibration with Kytola software

TYPICAL APPLICATIONS

- Paper machine oil lubrication systems
- Ship propulsion systems
- Oil rig propulsion systems
- Steel mills
- Mining


Model	OILAN A4
Maximum range	0—5000 ppm
Accuracy	± 30 ppm within calibrated measuring range and under calibration conditions
Ambient temperature	+5 — +60°C
Oil sample temperature	+5 — +60°C
Oil connection	G or NPS 1/4"
Oil purity classification	19/17/14, ISO 4406
Oil viscosity	10—680 cSt
Oil sample pressure	1—10 bar
Enclosure	Aluminium
Supply voltage	24 VDC
Supply current	1 A max
Current output	4—20 mA
Alarm relay	NO (normally open) or NC (normally closed), selectable using software; max. 48 VDC /100 mA
Communication	Modbus RTU (RS485)
IP Class	IP 65
Weight	4.05 kg including hoses

OILAN-A4-

Oil Connection

G 1/4" female adapter (standard)
NPS 1/4" female adapter

N

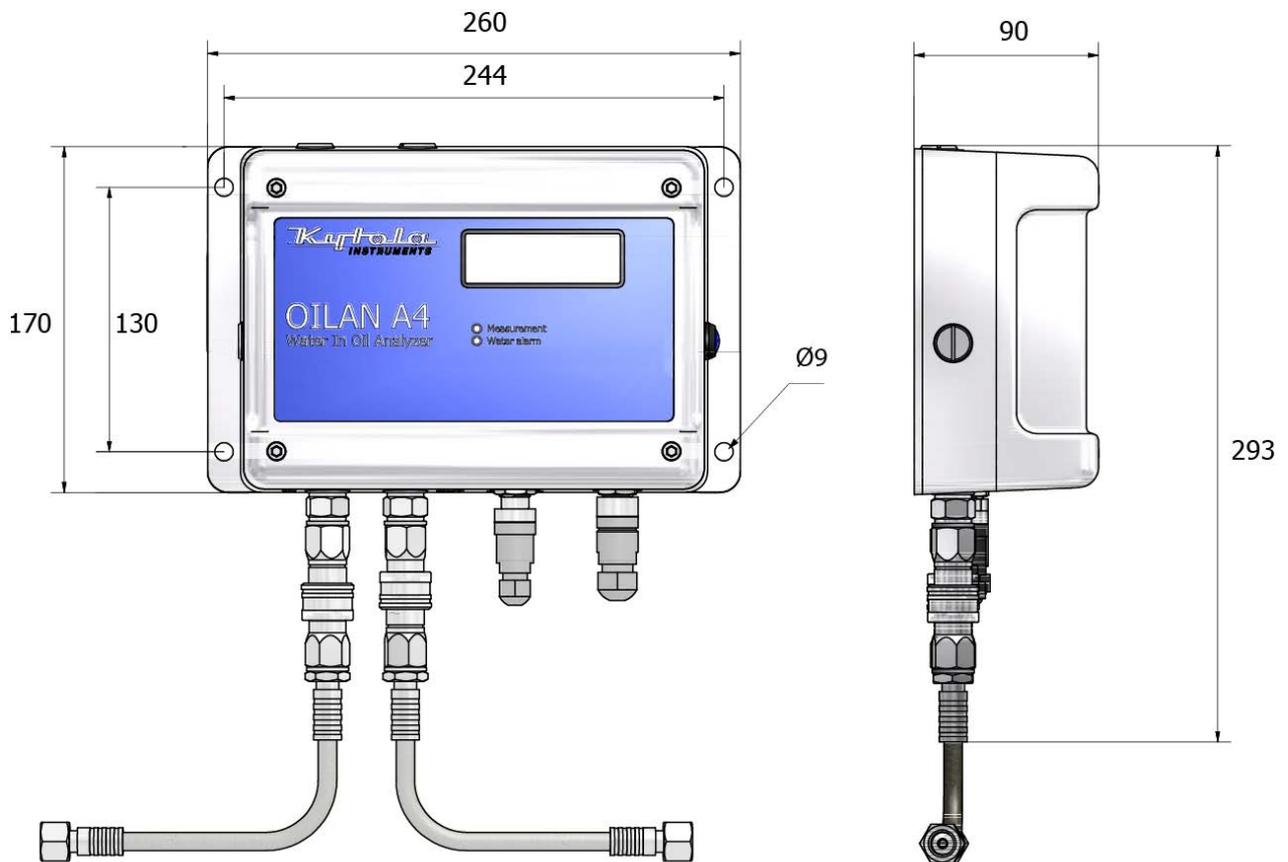

Kytola
INSTRUMENTS

www.kytola.com



Kytola Instruments Oy

Olli Kytölän tie 1
FI-40950 Muurame, Finland
Tel. +358 20 779 0690
Fax +358 14 631 419
E-mail info@kytola.com